



FIRE PROTECTION



AC916MEXX

Electromagnetic FIRE DOOR HOLDERS - Surface Mounting

Door holders are generally linked to a fire system that will automatically release the doors in case of a fire by switching the power off. If required, it can also be manually operated by the release button.

STANDARD FEATURE

Mounted in a reinforced aluminium housing with a spring loaded device to eliminate residual magnetism, including a diode for protection, manual release button and electrical terminal connections.

This door holder is specially designed for use in areas of vandalism (schools, colleges, public area...), industrial areas (warehouse, exhibition centre, supermarket, hospital...), or can be suited to every type of fire protection system.

Complete with fitting instructions and flat keeper plate.

TECHNICAL SPECIFICATIONS

Holding Force - **20Kg**

Voltage - **24VDC or 48VDC**

Nominal power at 20°C - **0.6W**

Protection Class - **III**

Weight - **600g**

Temperature Class - **B**

Temperature Range - **-5°C / +40°C**


Protection Rating - **IP42 EN60529**

Electrical Connection - **Terminal Board**



Box Colour - **Grey RAL 9002 painted steel**

Conformity with Standards -

NF S 61 937 1&2, EN1155:1997 + A1:2002 + AC:2006

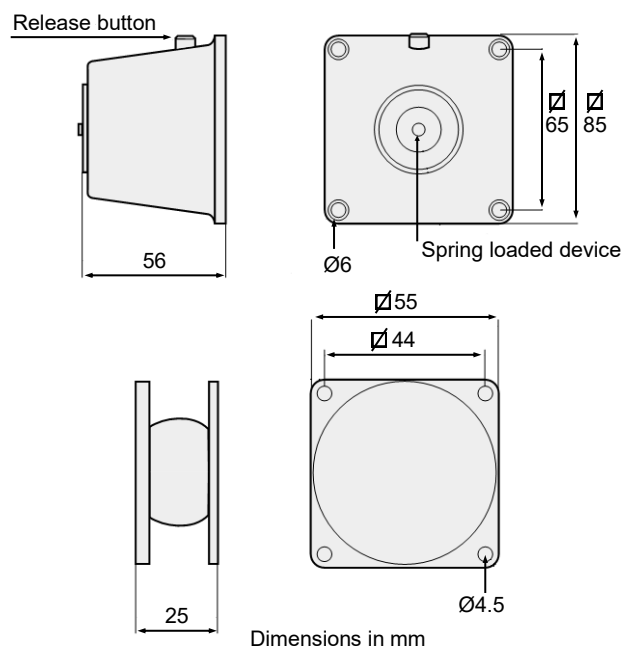

ITEM	Holding Force	Voltage	Diode
AC916ME07	20KG	24VDC	YES
AC916ME08	20KG	48VDC	YES

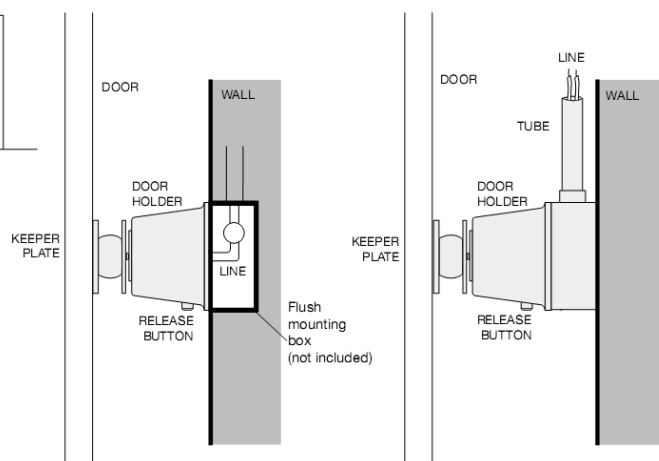

HE & BS Benson Ltd

AC916ME07 REV 2 2021

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk