



FIRE PROTECTION



AC916MXXX

Electromagnetic FIRE DOOR HOLDERS - Surface Mounting

Door holders are generally linked to a fire system that will automatically release the doors in case of a fire by switching the power off. If required, it can also be manually operated by the release button.

STANDARD FEATURE

Fire proof door holder in an ABS plastic box, spring loaded device to eliminate residual magnetism, release button, two electrical terminal connections and two plastic cable glands.

Suited for every type of fire protection system.

Complete with fitting instructions, flat or swivel keeper plate.

TECHNICAL SPECIFICATIONS

Holding Force Power ON - **20Kgf**

Voltage - **24VDC/48VDC (Automatic Switching)**

Nominal Power - **24VDC=0.9W, 48VDC=1W**

Protection Class - **III**

Protection Rating - **IP42 EN60529**

Weight - **460g**

Temperature Class - **B**



Temperature Range - **-5°C / +40°C**

Electrical Connection - **Terminal Board**

Box - **ABS Fire Resistant Plastic**

Conformity with Standards -

NF S 61 937 1&2, EN1155:1997 + A1:2002 + AC:2006

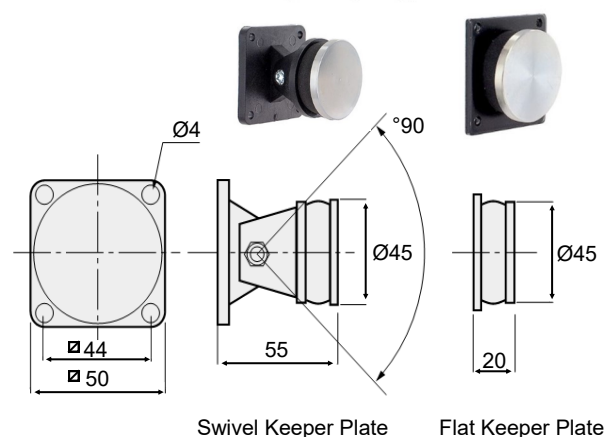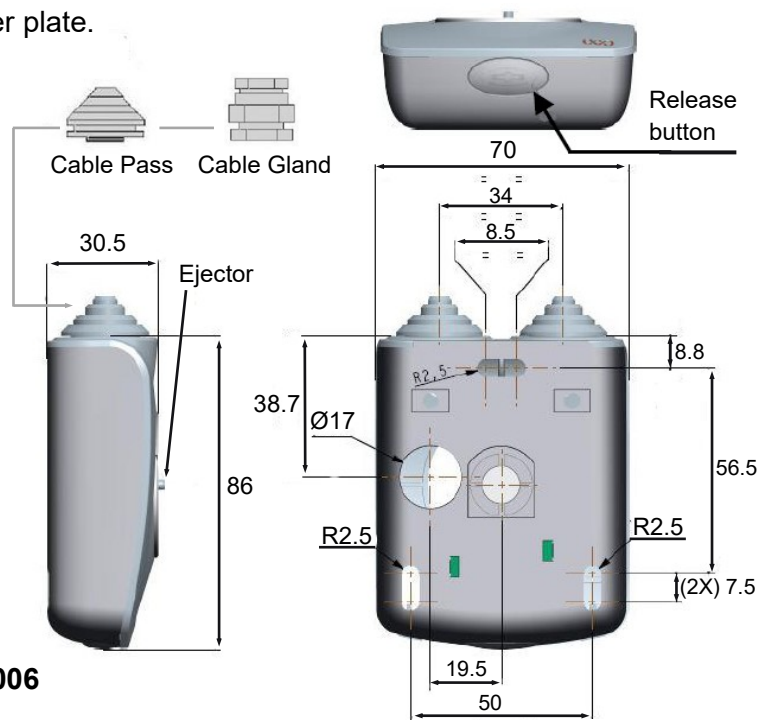

Swivel Keeper Plate Flat Keeper Plate

Dimensions in mm

ITEM	Cable Outlet	Holding Force	Keeper Plate
AC916MG01	Cable Pass	20 Kgf	FLAT
AC916MG02	Cable Pass	20 Kgf	SWIVEL
AC916MH01	Cable gland	20 Kgf	FLAT
AC916MH02	Cable gland	20 Kgf	SWIVEL

HE & BS Benson Ltd

AC916MXXX REV 2 2022

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk