



## B.12 SHOTBOLT SOLENOID LOCKING POWER OFF

### BDC.12

Stroke: **5mm**

Maximum radial force: **40Kg**

Input and Output force: **30g**

Standard voltage: **24V DC**

Possible voltage: **From 12 - 205V DC**

Duty cycle: **Permanent (100%)**

Power: **5.5W**

Return Spring: **Internal**

Service Operating Temperature: **-5°C + 40°C**

Protection rating: **IP40**


Temperature rating: **B**

According to standards: **NF C 79-300**

Weight: **60g**

### Example of use: Access Control

Locking doors, levers, drawers, inspection hatches, various mechanisms or as stops on manufacturing tools.

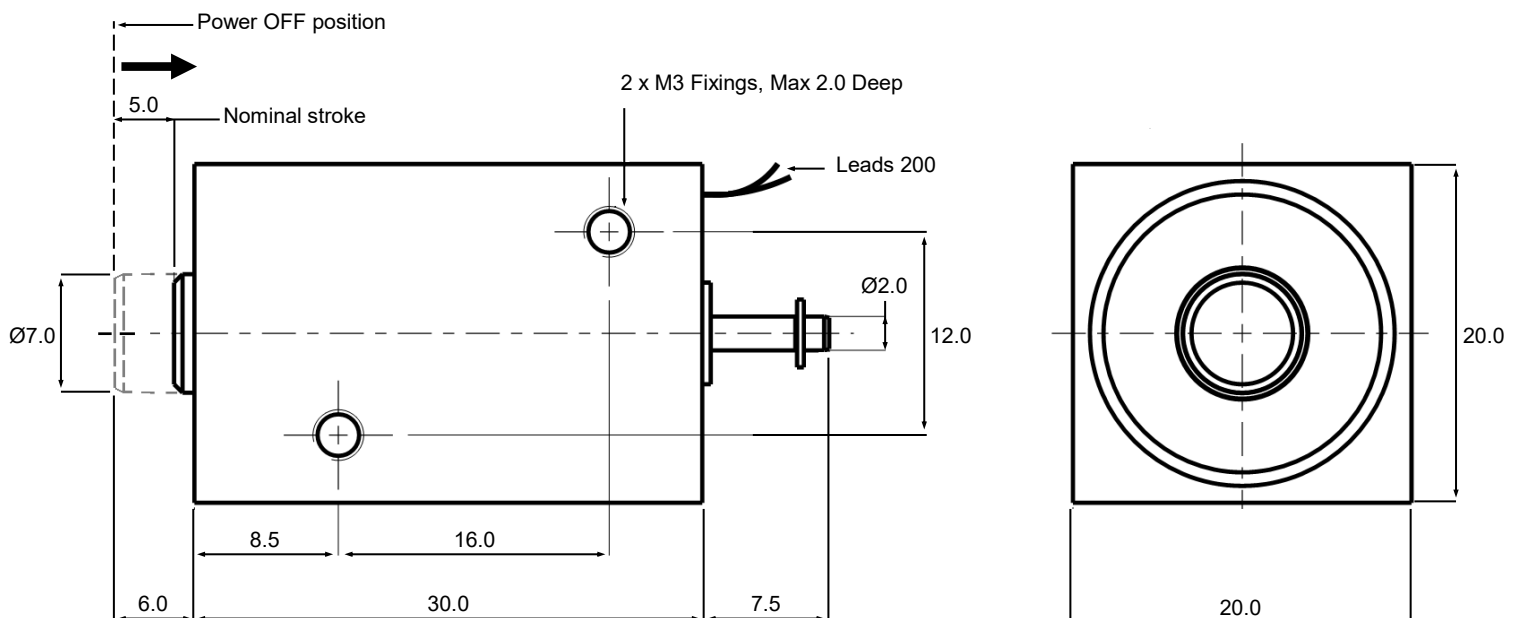

*We reserve the right to alter or amend designs without prior notice.*

**HE & BS Benson Ltd**

**1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR**

**+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk**

B12 Rev 3 - 2021