



B5 AC & DC LINEAR SOLENOID


Availability

AC or DC Standard Stroke
PULL - THRUST - PULL & THRUST
DC Long Stroke - PULL


Solenoid shown in energised position

Weight complete 566g
Plunger weight 85g max

Forces shown are at
Working temperature

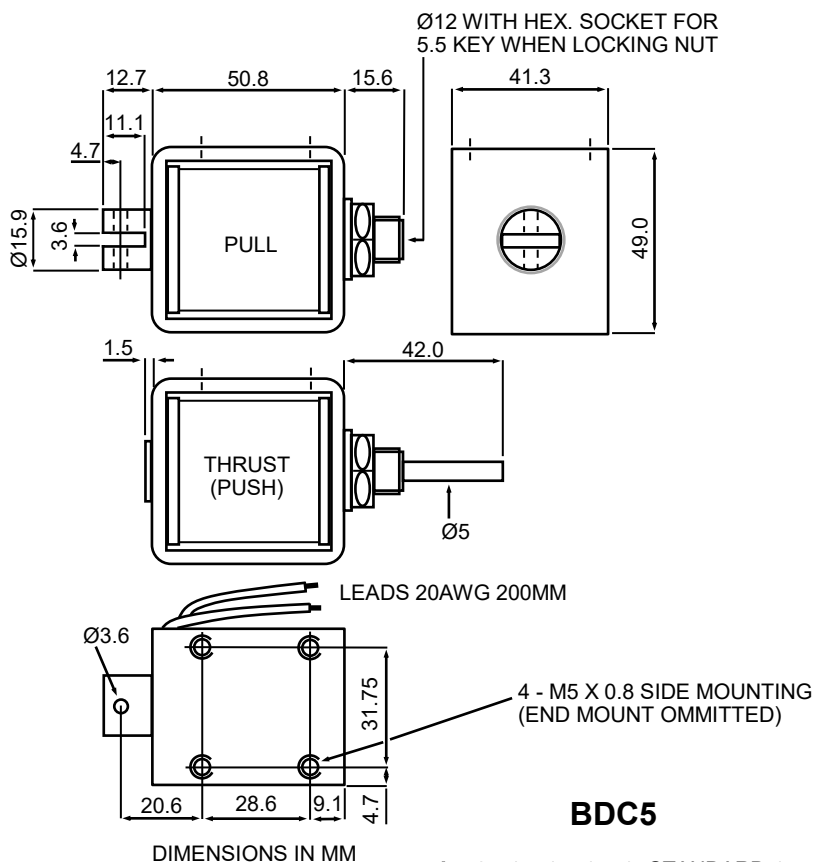

BAC5

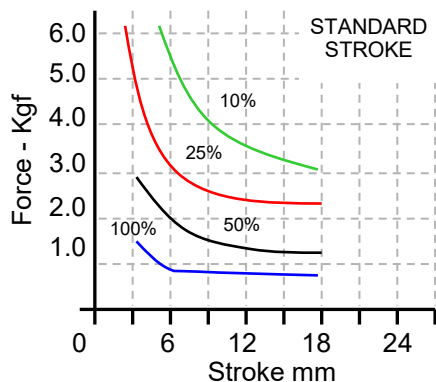

AC Closed VA


100% Rtg = 30VA

50% Rtg = 70VA


25% Rtg = 120VA

10% Rtg = 300VA

BDC5

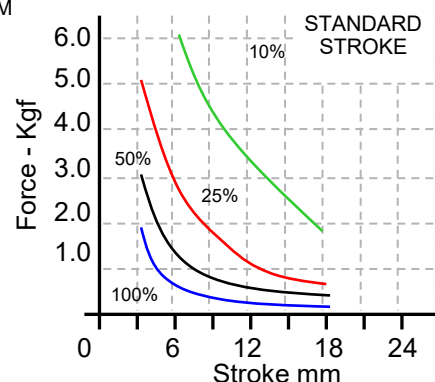

BAC5

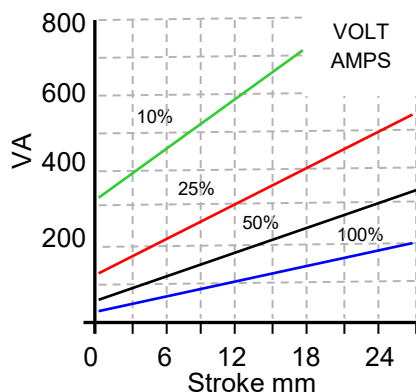

DC Watts


100% Rtg = 15W

50% Rtg = 30W

25% Rtg = 60W

10% Rtg = 150W

BDC5L

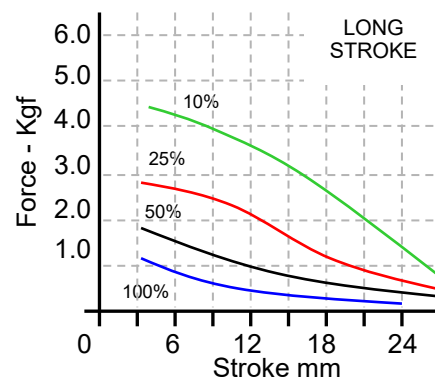

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****

We reserve the right to alter or amend designs without prior notice.



ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎0763173897 ✉info@elektrokomponenter.se 🌐www.elektrokomponenter.se

CODING

Please use the standard coding below when advising your design requirement.

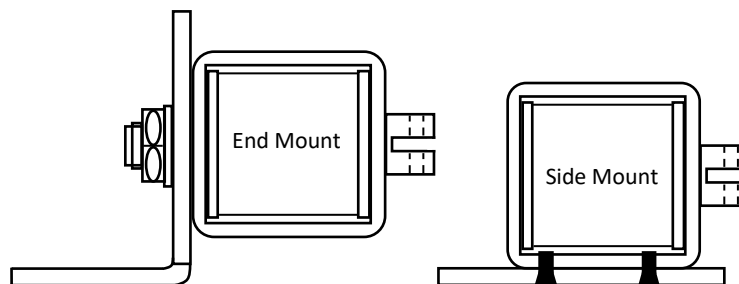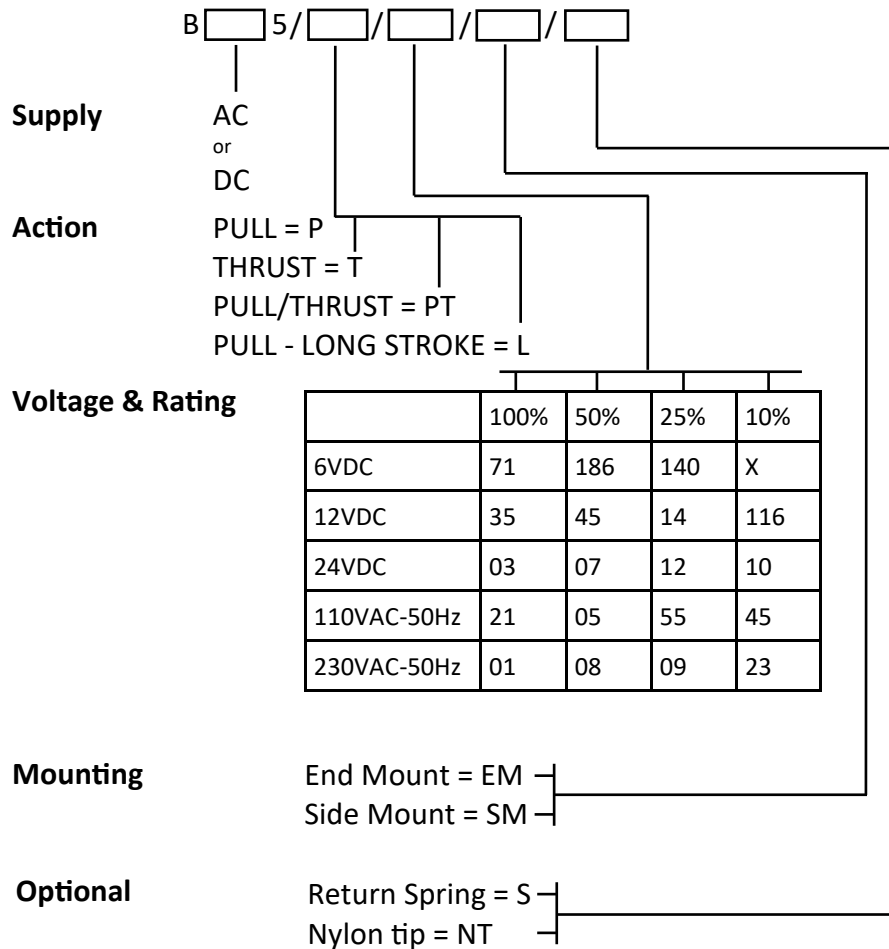

Example - BDC5 / P / 03 / SM / S

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎ 0763173897 ✉ info@elektrokomponenter.se 🌐 www.elektrokomponenter.se