

B6 DC LINEAR SOLENOID


Availability

DC Standard Stroke
PULL
THRUST
PULL / THRUST

Solenoid shown in energised position


Weight complete 100g
Plunger weight 18g max

Forces shown are at working temperature

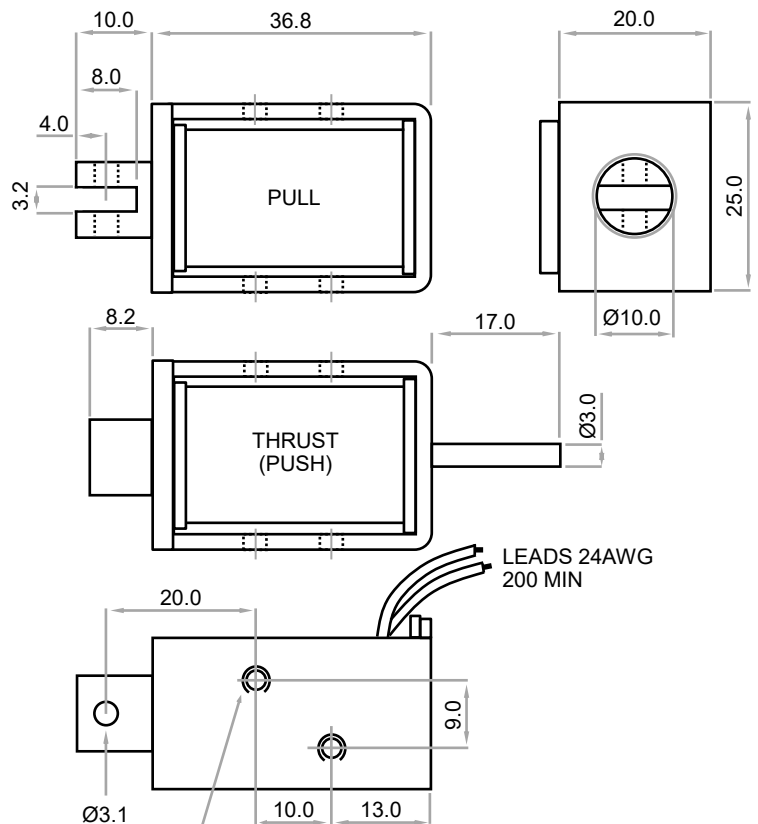

2 X M3X0.5 FIXING HOLES BOTH SIDES OF FRAME

DIMENSIONS IN MM

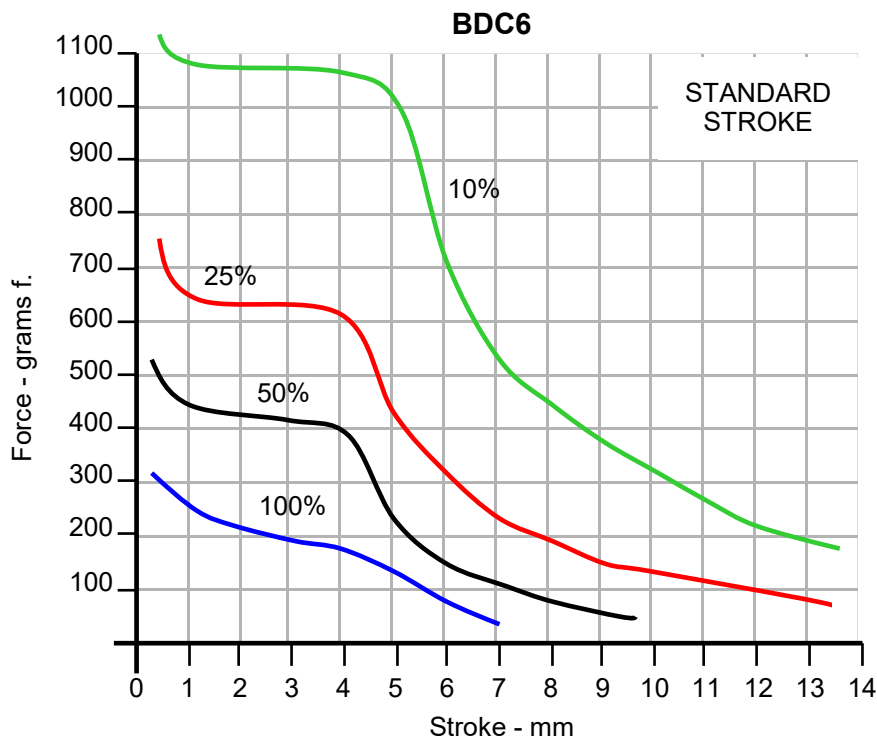

DC Watts

100% Rtg = 5W

50% Rtg = 10W

25% Rtg = 20W

10% Rtg = 50W

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.


ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎ 0763173897 ✉ info@elektrokomponenter.se 🌐 www.elektrokomponenter.se

CODING

Please use the standard coding below when advising your design requirement.

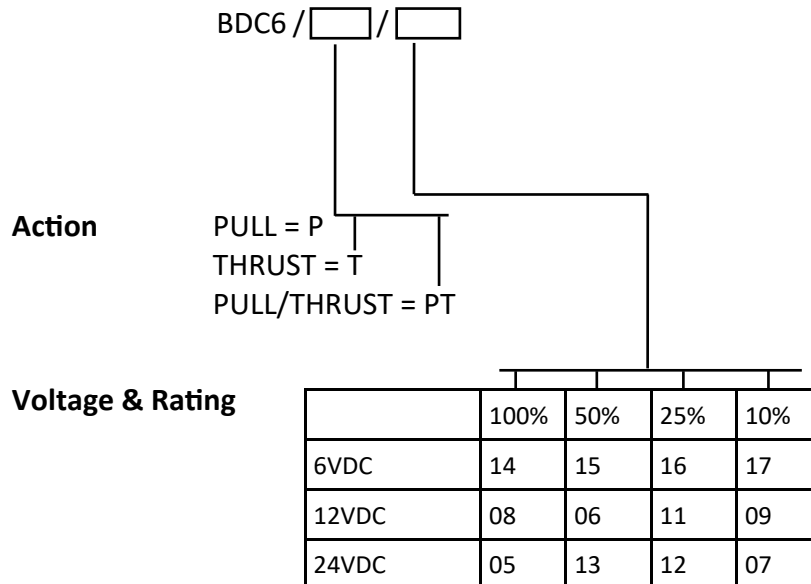

Example - BDC6 / P / 06

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎0763173897 ✉ info@elektrokomponenter.se 🌐 www.elektrokomponenter.se

B6 Rev 7A - 2022