

B7 DC LINEAR SOLENOID





Availability

DC Standard Stroke
PULL - THRUST - PULL/THRUST
DC Long Stroke PULL
(THRUST on request)

**Solenoid shown in
energised position**

Weight complete 1.1Kg
Plunger weight 180g max

Forces shown are at
working temperature

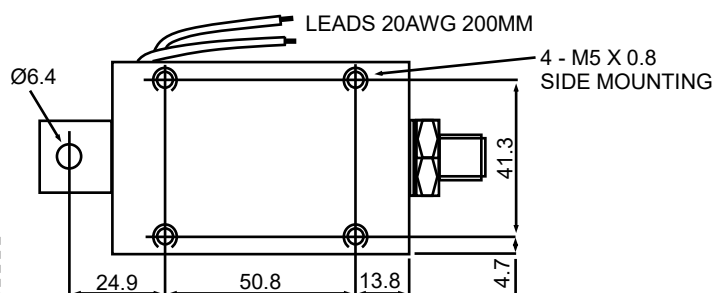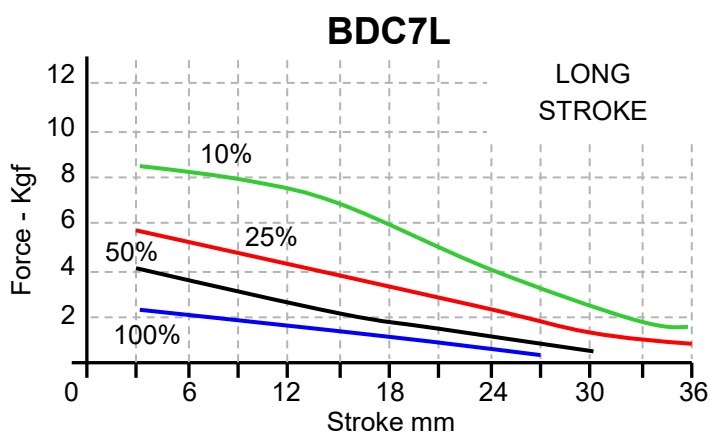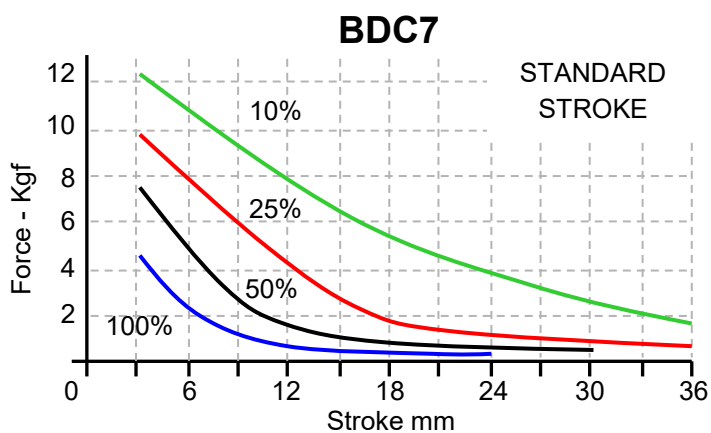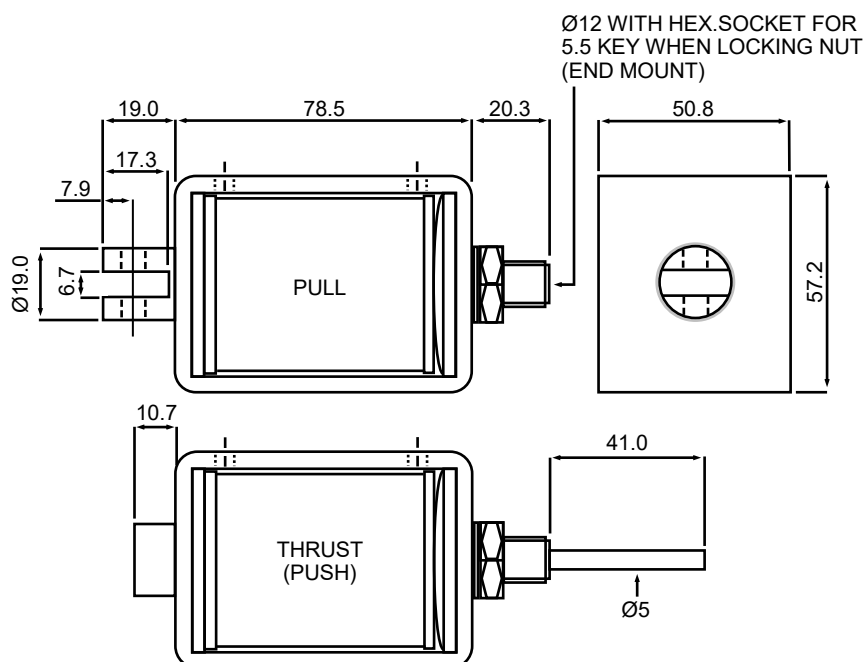

DIMENSIONS IN MM

DC Watts

100% $R_{tg} = 20W$

50% $R_{tg} = 40W$

25% $R_{tg} = 80W$

10% $R_{tg} = 200W$

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.



ELEKTROKOMponenter AB

Karl Johansvagen 75, 725 91 Vasteras Sweden

☎0763173897 ✉info@elektrokomponenter.se 🌐www.elektrokomponenter.se

CODING

Please use the standard coding below when advising your design requirement.

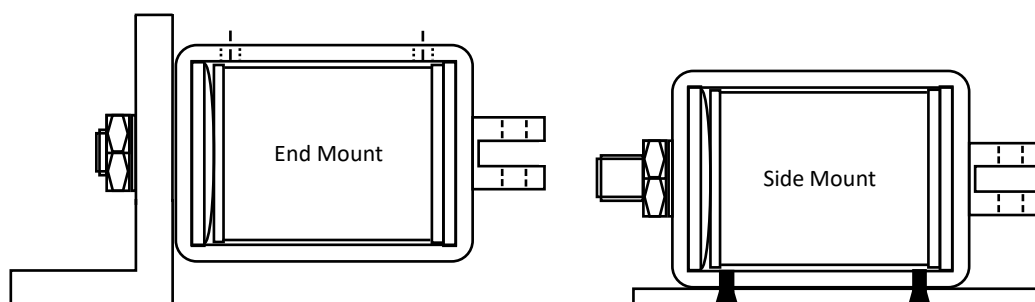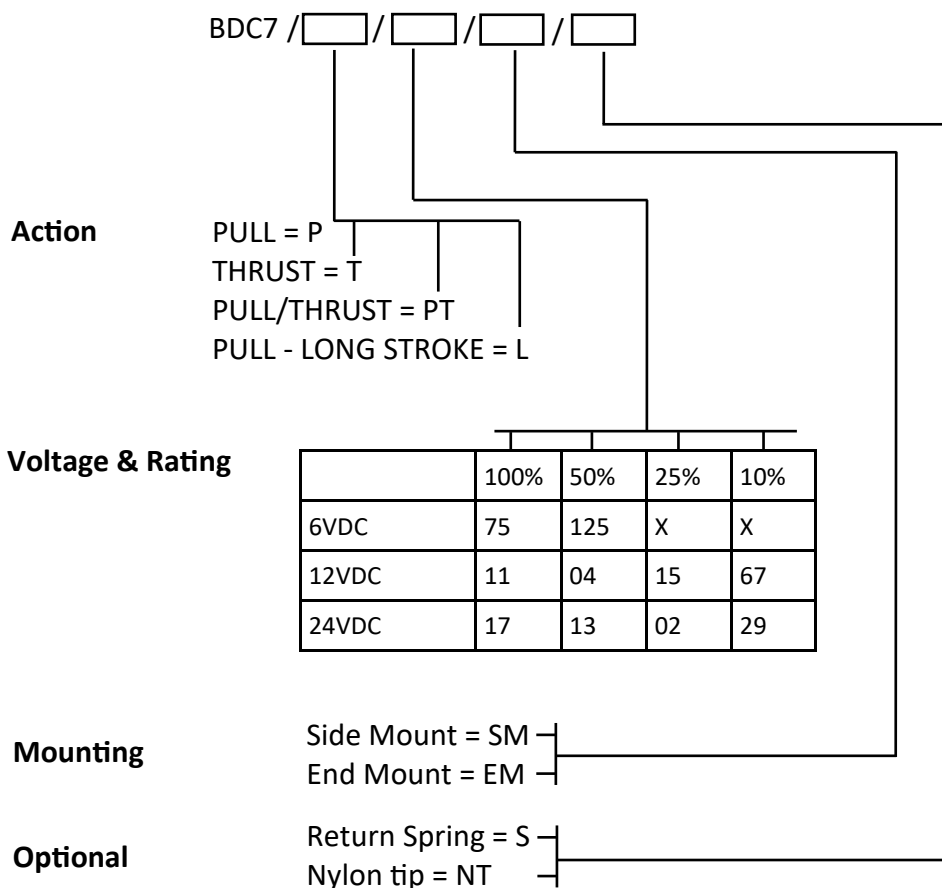

Example - BDC7 / L / 17 / EM / S

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎0763173897 ✉info@elektrokomponenter.se 🌐www.elektrokomponenter.se