



B8 DC LINEAR SOLENOID

Availability

- DC Only
- PULL
- THRUST
- PULL & THRUST
- LONG STROKE PULL

Solenoid shown in energised position

Weight complete 1.9 Kg
Plunger weight 400g max


DC Watts

100% Rtg = 20W

50% Rtg = 40W


25% Rtg = 80W

10% Rtg = 200W

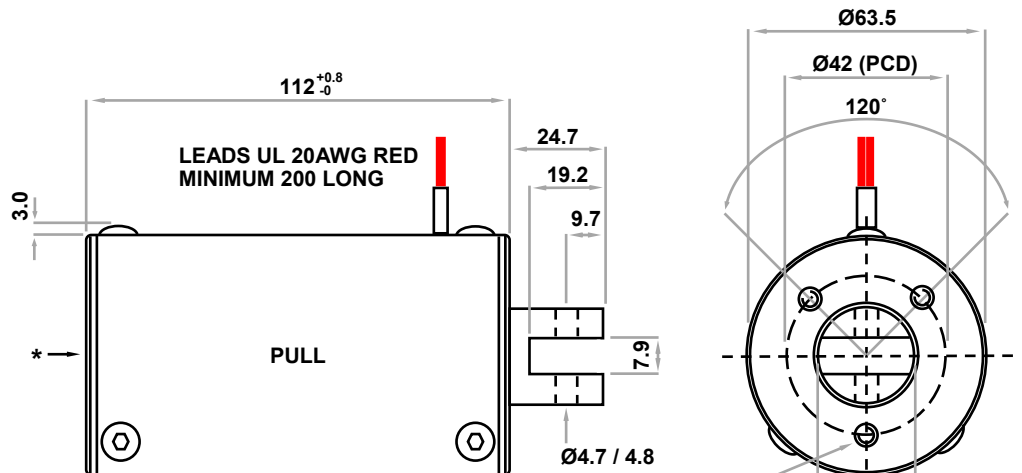

M6X0.1 THREAD FIXINGS X3
SIMILAR FIXINGS AT OPPOSITE END*


DO NOT EXCEED MORE THAN 11mm INTO SOLENOID WITH SCREW

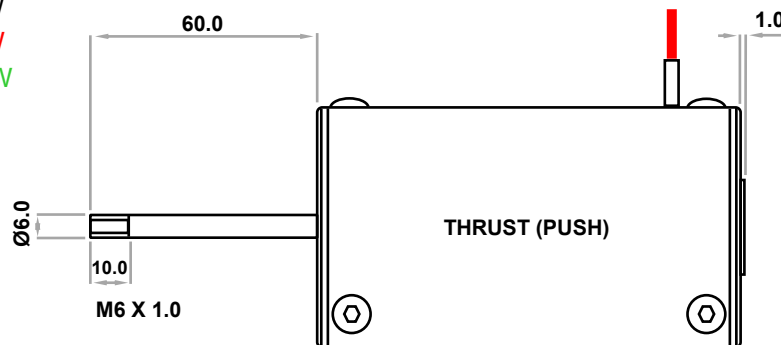


Forces shown are at working temperature
Cold forces are higher

Dimensions in mm

BDC8

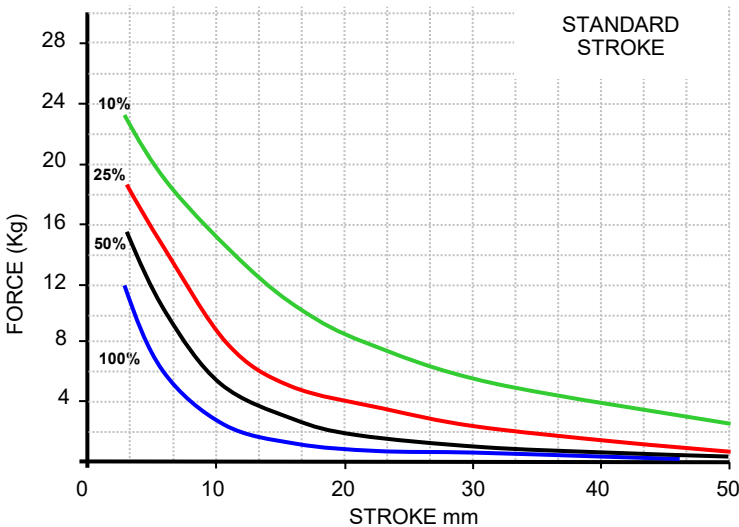

BDC8L

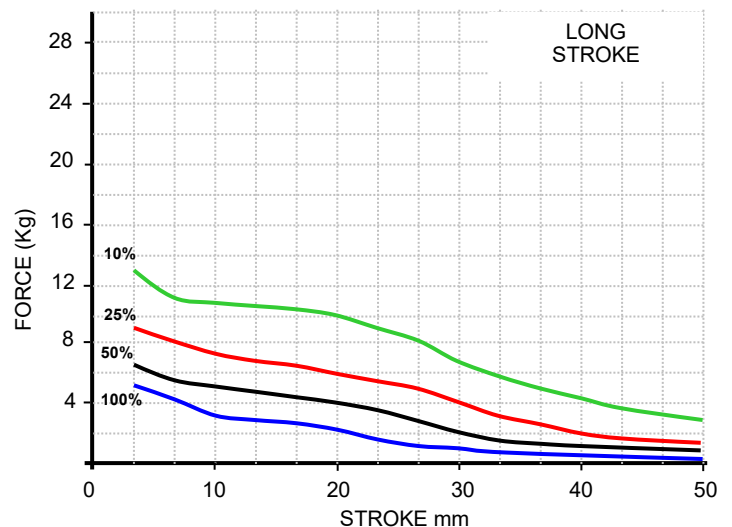

** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised **
We reserve the right to alter or amend designs without prior notice.


ELEKTROKOMponenter AB

Karl Johansvagen 75, 725 91 Vasteras Sweden


☎ 0763173897 ✉ info@elektrokomponenter.se 🌐 www.elektrokomponenter.se

CODING

Please use the standard coding below when advising your design requirement.

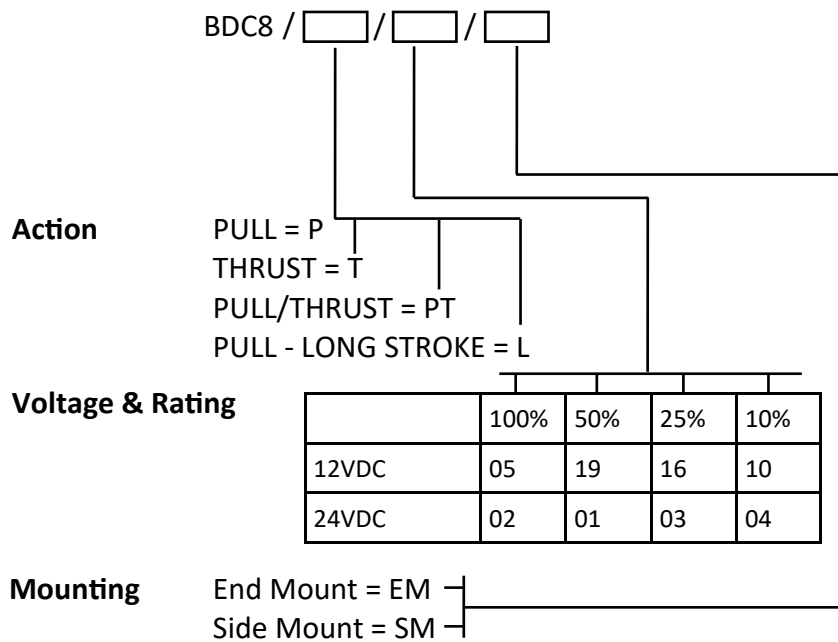

Side Mount Option = Welded Bracket to Body

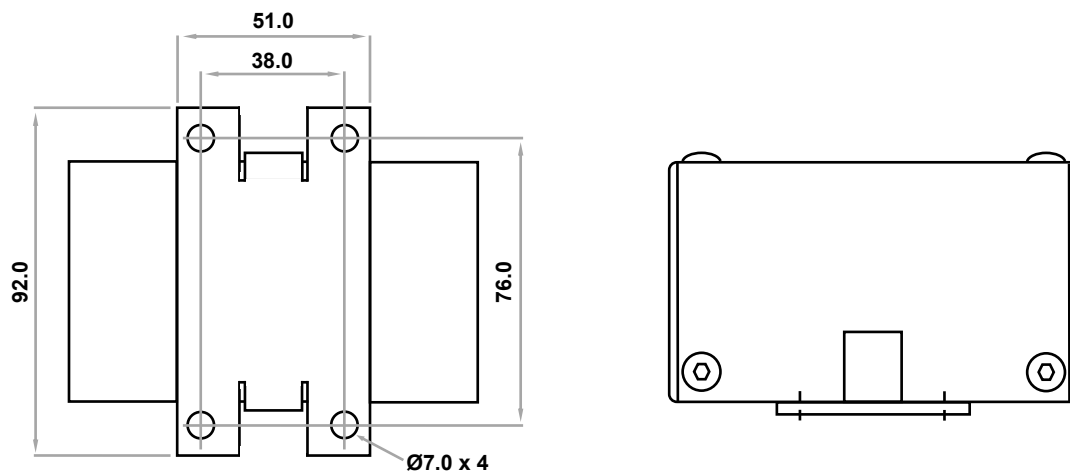

Example - BDC8 / P / 03 / EM

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

We reserve the right to alter or amend designs without prior notice.

ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎ 0763173897 ✉ info@elektrokomponenter.se 🌐 www.elektrokomponenter.se

B8 Rev 4 - 2022