



BLM0730S DC LATCHING SOLENOID

DC Thrust Type

Pull/Thrust Type Available
Standard Voltage 12V or 24V

**Solenoid shown in
energised position**

Weight complete 34g
Plunger weight 8g

Solenoid CLOSSES with




RED Lead + VE

Solenoid OPENS with


BLACK Lead + VE

De-latch power - 4.8W

(Mechanical assistance is required when de-latching,
ie via mechanism or return spring)

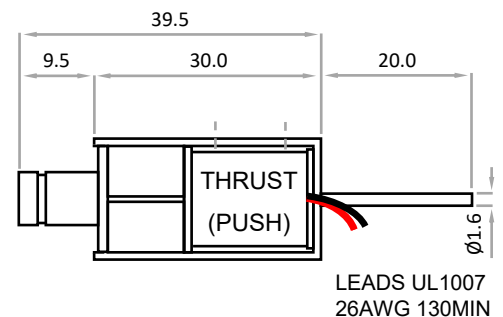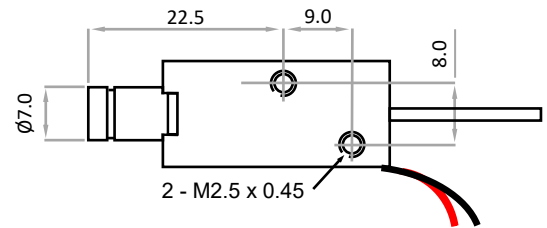

DIMENSIONS IN MM

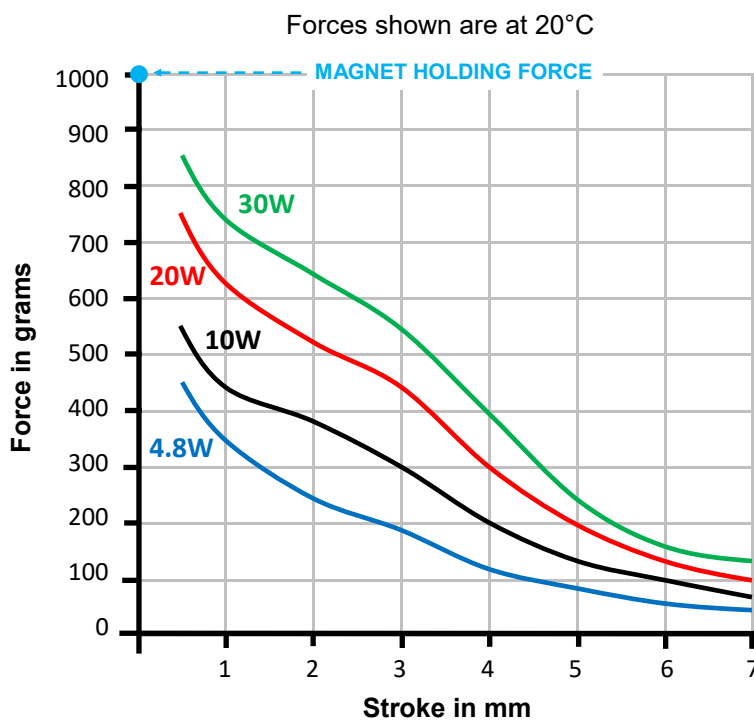

DC Watts

63% Rtg = 4.8W

30% Rtg = 10W

15% Rtg = 20W

10% Rtg = 30W

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****

We reserve the right to alter or amend designs without prior notice.

ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎0763173897 ✉info@elektrokomponenter.se 🌐www.elektrokomponenter.se

BLM0730S REV 1 2019