






BMO-0630S DC LINEAR SOLENOID


DC THRUST TYPE (Push)
PULL - PULL & THRUST Available
Standard Voltages 12V & 24V.

**Solenoid shown in
energised position**

Weight complete 42g
Plunger weight 5g max

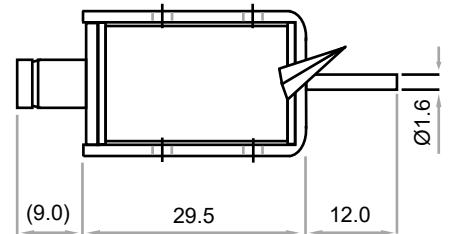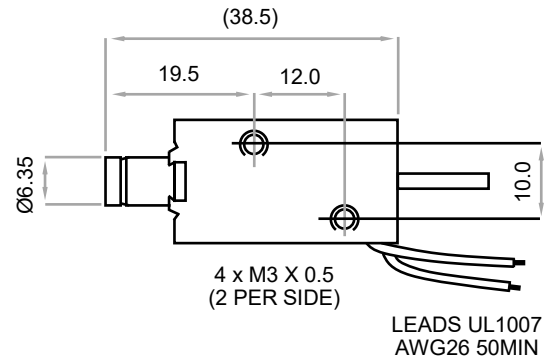

DIMENSIONS IN MM

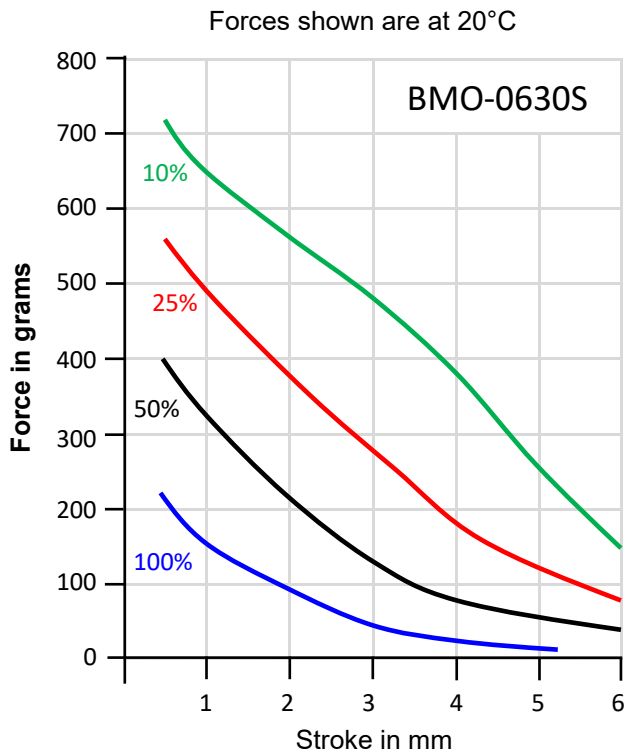

DC Watts
100% Rtg = 2.4W
50% Rtg = 4.8W
25% Rtg = 9.6W
10% Rtg = 24W

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.

ELEKTROKOMPONENTER AB

Karljohansvagen 75, 725 91 Vasteras Sweden

☎0763173897 ✉info@elektrokomponenter.se 🌐www.elektrokomponenter.se

BMO 0630 Rev 1 - 2019