



CLP14 INDUSTRIAL SOLENOID 8.19.AB.83



Availability

For DC only.
Stroke 16mm
Pull or Push

Standard Voltage 24V DC
Possible Voltage 12 - 220V DC
IP40

**Solenoid shown in
energised position**

Weight complete 600g
Plunger weight 100g

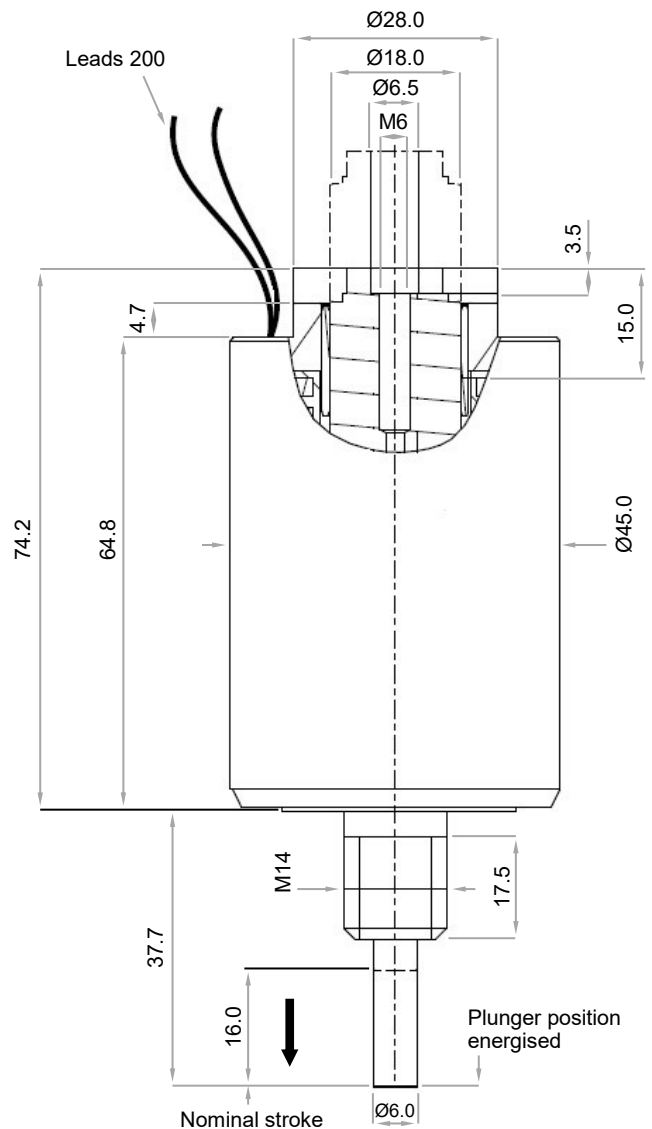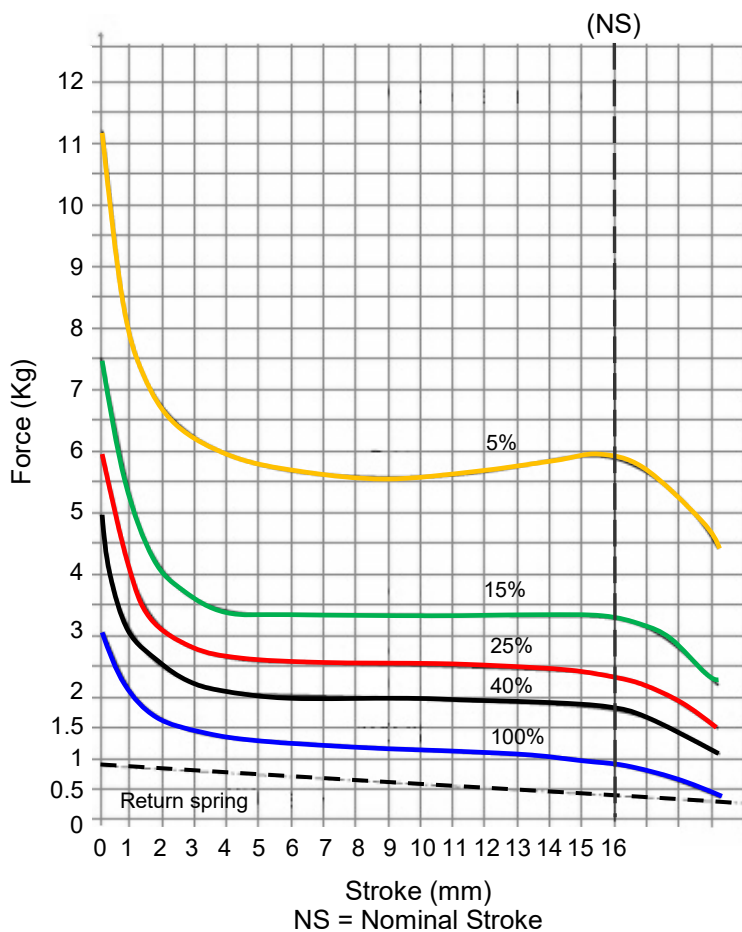

Dimensions in mm

Forces shown are at working temperature
Cold forces are higher

DC Watts

Cont Rtg = 18W

40% Rtg = 42W

25% Rtg = 65W

15% Rtg = 105W

5% Rtg = 310W

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

CLP14 Rev 3 - 2023