




## CLP254-45 DC TUBULAR SOLENOID


**Availability**  
For DC only.  
PULL - THRUST

**Solenoid shown in  
energised position**

**Weight complete 160g  
Plunger weight 37g max**

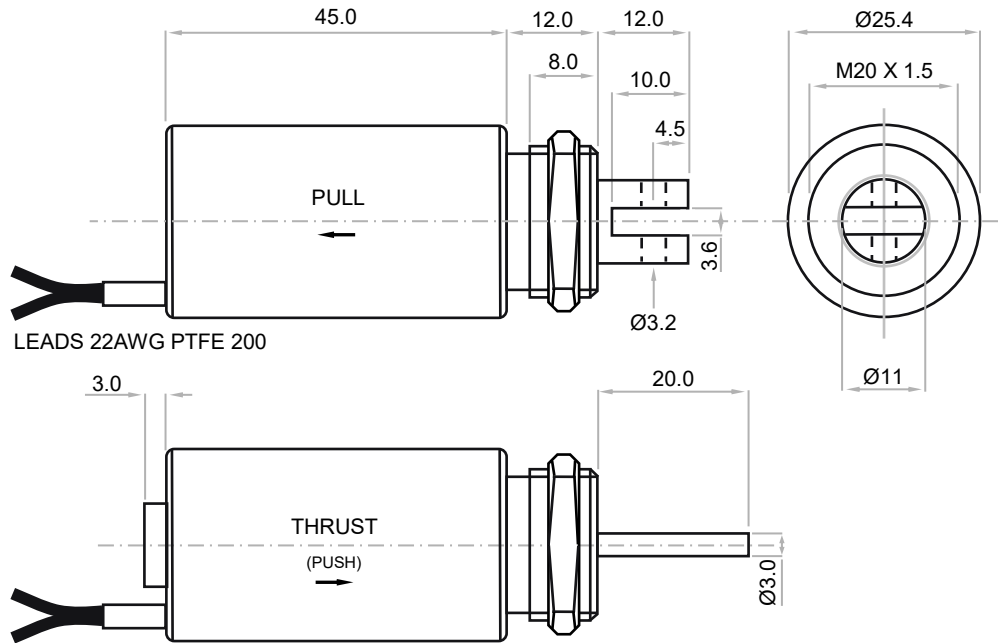

DIMENSIONS IN MM

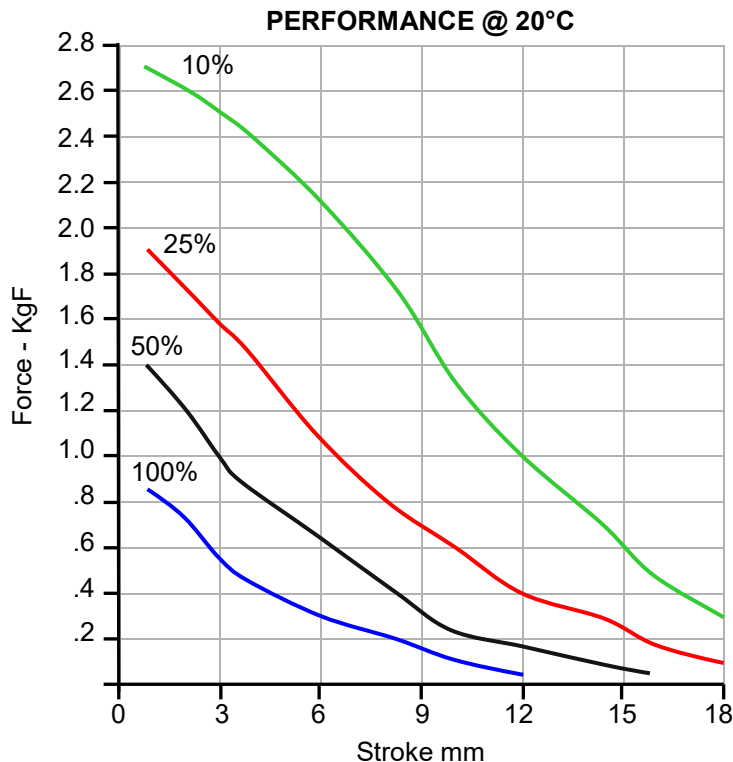

Maximum Watts @ 20°C  
Heat sink equivalent of  
100x100x3mm min Aluminium plate

### DC Watts

100% Rtg = 9W

50% Rtg = 18W

25% Rtg = 36W

10% Rtg = 90W

### STANDARD CODES

| CLP254-45 |               |    |    |      |     |
|-----------|---------------|----|----|------|-----|
| ACTION    | PULL          | P  | T  | 100% | 50% |
|           | THRUST (PUSH) |    |    |      |     |
| COIL      | 12VDC         | 01 | 02 | 03   | 04  |
|           | 24VDC         |    |    |      |     |

ie CLP254-45 / P / 01

**\*\* Please note: Plunger coupling, thrust rods and lead length can all be customised \*\***  
We reserve the right to alter or amend designs without prior notice.

**ELEKTROKOMPONENTER AB**

Karljohansvagen 75, 725 91 Vasteras Sweden

☎ 0763173897 ✉ info@elektrokomponenter.se 🌐 www.elektrokomponenter.se